

2MP Box IP Camera with 140dB Ultra WDR




*item shown with optional lens



- 2 Megapixel (1920 × 1080) high resolution
- 6 behavior analyses, 3 exception detections, face detection and counting
- 140 dB Ultra WDR, 3D-DNR, BLC, HLC, ROI
- Auto Iris (P-iris optional), Auto back-focus optional
- H.265+, H.265, H.264+, H.264 Smart Codec
- PoE 802.3at compliant, supports PoE loop-through
- Built-In micro SD/SDHC/SDXC card slot, up to 256 Gb
- Anti-static dust free
- 6 behavior analyses, 3 exception detections, face detection and counting



Dimensions

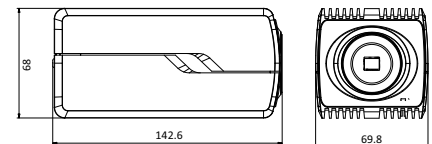

Technical Specifications

Accessories



BIC01 Indoor Casing



BOC01 Outdoor Casing



WMB01 Wall Mount Bracket



MVL 0316
3.8 to 16mm DC Iris



MVL 1140
11 to 40mm DC Iris

| | |
|-----------------------------|---|
| Image Sensor | 1/1.8" Progressive Scan CMOS Sensor with ICR filter |
| Min. Illumination | 0.0005 lux @ (F1.2, AGC ON) |
| Lens Mount | CS Mount |
| Day & Night | Mechanical ICR Filter |
| Video Compression | H.265+, H.265, H.264+/H.264/MJPEG |
| Bit Rate | 256 Kbps - 16 Mbps |
| Video Streams | 3 (Main, Sub, & Third Stream) |
| Image Processing | 140dB Ultra WDR / BLC / HLC / Smart Defog / EIS / 3D-DNR |
| Frame Rate | Main Stream: 50fps (1920 x 1080, 1280 x 960, 1280 x 720) Sub Stream: 25fps (704 x 576, 640 x 480) Third Stream: 25fps (1920 x 1080, 1280 x 720, 704 x 576, 640 x 480) |
| Image Setting | Saturation, Brightness, Contrast, Sharpness (via client software or web browser) |
| Audio | 64Kbps (G.711) / 16Kbps (G.722.1) / 16Kbps (G.726) / 32-192Kbps (MP2L2) |
| Alarm Trigger | Motion detection, Video Tampering, Network Disconnect, IP address conflict, Storage exception |
| Protocols | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1x, QoS, IPv6, Bonjour |
| Smart Features | Line crossing, Intrusion, Region Entrance / Exit, Unattended Baggage, Object Removal, Exception, Face detection & Object Counting |
| System Compatibility | ONVIF (Profile S & G) / ISAPI |
| Communication | 1 RJ45 10 M/100 M Ethernet port |
| Operating Conditions | -30°C - 60°C, Humidity < 95% (non-condensing) |
| Power Supply | DC 12 V, AC 24V; PoE (802.3af, class 0) - supports PoE loop-through |
| Power Consumption | Max. 7W |
| Dimension | 142.6 × 69.8 × 68 mm |
| Weight | 730 g |

* Technical specifications and images are subject to changes

© 2018 PIXELab. All rights reserved