





8MP XPERT IR Array Weatherproof IP Camera

- 8 Megapixel (3840 × 2160) high resolution
- Progressive scan CMOS with IR cut filter
- XPERT Infrared LED Array, 50m IR Illumination
- H.265+, H.265, H.264+, H.264, MJPEG
- 120 dB Wide Dynamic Range
- 3D Digital Noise Reduction
- PoE 802.3af compliant
- IP67 rated acc. to IEC60529

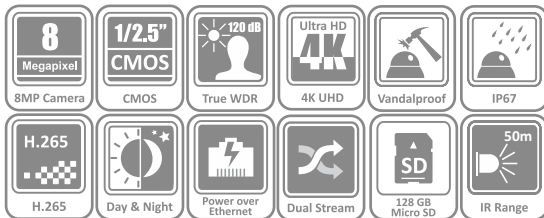

Dimensions

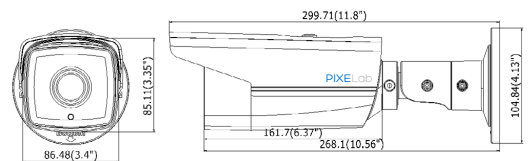

Smart Features:

- Behavior Analysis
- Line Crossing Detection
- Intrusion Detection
- Object Removal Detection
- Unattended Baggage Detection
- Facial Detection

Technical Specifications

Image Sensor	1/2.5" Progressive Scan CMOS Sensor with ICR filter
Min. Illumination	0.01 Lux (F1.2,AGC ON), 0 lux with IR
Lens	M12, 4mm @ F2.0 (79°) - 2.8mm, 6mm, 8mm, 12mm optional
Day & Night	IR Array LED (50m), Mechanical ICR Filter
Video Compression	H.265, H.265+, H.264+/H.264/MJPEG
Bit Rate	32 Kbps - 16 Mbps
Image Enhancement	120 dB True WDR, 3D-DNR, BLC
Max. Image Resolution	3840 x 2160
Frame Rate	20fps (3840 x 2160); 25fps (3072 x 1728, 2560 x 1440, 1920 x 1080, 1280 x 720)
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
Storage	NAS (Support NFS, SMB, CIFS); Built-in Micro SD/SDHC/SDXC slot, up to 128 GB
Alarm Trigger	Intrusion Detection, Line Crossing, Motion detection, Dynamic Analysis, Tampering, Network Disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP SNMP, HTTPS, FTP, 802.1x, QoS (SIP, SRTP, IPv6 optional)
Security	User authentication, Watermark
System Compatibility	ONVIF (Profile S & G) / ISAPI
Communication	1 RJ45 10 M/100 M ethernet port
Operating Conditions	-30°C - 60°C (-22°F - 140°F), Humidity < 95% (non-condensing)
Power Requirements	12 VDC ± 25%, 7.5W; PoE (802.3af), max. 9.5W
Dimension	105 x 105 x 300 mm
Weight	1200 g