





## 4MP IR Weatherproof IP Camera with True WDR

- 4 MP (2688 × 1520) high resolution
- 4MP realtime video recording
- 120 dB True Wide Dynamic Range
- 3D Digital Noise Reduction
- Tri-Streams - H.265+, H.265, H.264+, H.264
- 2 Behavior Analysis + Face Detection
- True day & night operation. Up to 30m IR range
- PoE 802.3af compliant
- IP67 weatherproof protection

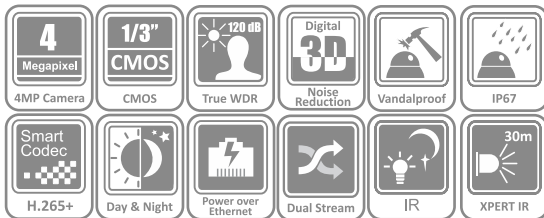

### Dimensions

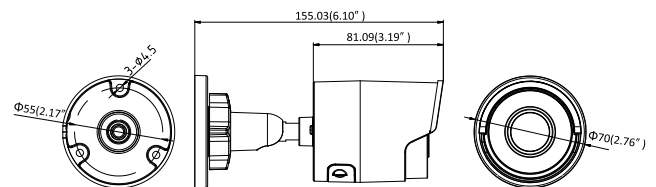

### Technical Specifications

<b>Image Sensor</b>	1/3" Progressive Scan CMOS Sensor with ICR filter
<b>Min. Illumination</b>	0.01 Lux (F1.2,AGC ON), 0 lux with IR
<b>Lens</b>	4mm @ F1.6 (83°), Optional 2.8 (103°), 6 mm (51°), 8 mm (39°)
<b>Day &amp; Night</b>	IR Cut Filter with Auto-switch
<b>Video Compression</b>	H.265+, H.265, H.264+, H.264, MJPEG
<b>Bit Rate</b>	256 Kbps - 16 Mbps
<b>Video Stream</b>	Three (Main Stream, Sub Stream Third Stream)
<b>Max. Image Resolution</b>	4MP (2688 x 1520)
<b>Frame Rate</b>	25fps (2688 x 1520, 2560 x 1440, 2304 x 1296, 1920 x 1080)
<b>Image Processing</b>	120 dB True WDR, 3D DNR, BLC, ROI
<b>Image Setting</b>	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
<b>Onboard Storage</b>	Built-in Micro SD/SDHC/SDXC slot, up to 128 GB
<b>Alarm Trigger</b>	Face Detection, Line Crossing, Intrusion & Motion Detection, Dynamic Analysis, Tampering alarm, Network disconnect , IP address conflict, Storage exception
<b>Protocols</b>	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP SNMP, HTTPS, SIP, FTP, SRTP, 802.1x (IPv6 optional)
<b>Security</b>	User authentication, Watermark
<b>System Compatibility</b>	ONVIF (Profile S, Profile G) / ISAPI
<b>Communication</b>	1 RJ45 10 M/100 M ethernet port
<b>Operating Conditions</b>	-30°C - 60°C (-22°F - 140°F), Humidity < 95% (non-condensing)
<b>Power Supply</b>	12 VDC ± 25%; PoE (802.3af Class 3)
<b>Power Consumption</b>	Max. 6W
<b>Dimension</b>	70 DIA × 155 mm
<b>Weight</b>	420 g