





2MP Ultra Low Light IR Dome IP Camera with True WDR

- 2MP (1920 × 1080) high resolution
- 25 fps realtime video recording
- Progressive scan CMOS
- Support H.265+, H.265, H.264+, H.264, MJPEG tri-streams
- True day & night operation with IR illumination up to 30m
- PoE 802.3af compliant
- Impact protection up to IK10 (EN50102)
- True WDR 120 dB & 3D DNR

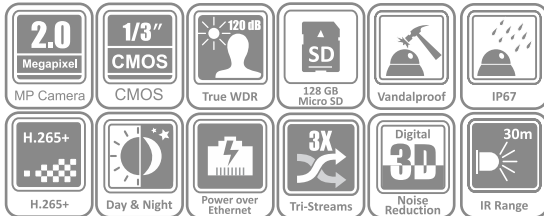

Dimensions

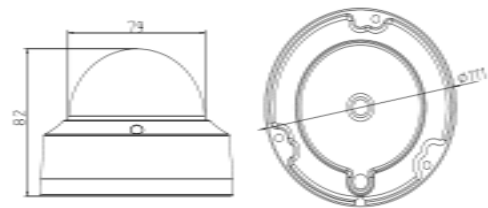

Smart Features:

- Behavior Analysis
- Line Crossing Detection
- Intrusion Detection
- Object Removal Detection
- Unattended Baggage Detection
- Facial Detection

Technical Specifications

Image Sensor	1/3" Progressive Scan CMOS Sensor with ICR filter
Min. Illumination	0.005 lux (F1.2, AGC ON), 0 lux with IR
Lens	4mm @ F2.0 (90°), 2.8mm & 6mm optional
Day & Night	IR Cut Filter with Auto-Switch
Video Compression	H.265+, H.265, H.264+, H.264, MJPEG; Tri-Stream
Bit Rate	32 Kbps - 16 Mbps
Image Processing	120dB True WDR, 3D-DNR, BLC, ROI
Max. Image Resolution & Frame Rate	2MP (1920 x 1080), 25fps
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
IR Illumination	Up to 30m
On-board Storage	Built-in Micro SD/SDHC/SDXC slot, up to 128 GB
Alarm Trigger	Line Crossing, Intrusion Detection, Motion Detection, Dynamic Analysis, Tampering Alarm, Network Disconnect, IP Address Conflict, Storage Exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, UPnP, 802.1x, QoS, IPv6, Bonjour
Security	User Authentication, Watermark, IP Address Filtering
System Compatibility	ONVIF (Profile S & G) / ISAPI
Communication	1 RJ45 10 M/100 M ethernet port
Operating Conditions	-30°C - 60°C, Humidity < 95% (non-condensing)
Power Requirement	12 VDC ± 25%; PoE (802.3af), max. 5W (with IR Filter On)
Protection	Ingress Protection: IP67 (IEC60529); Impact Protection: IK10 (EN50102)
Dimension	Dia 111 × 82 mm
Weight	500 g