





4K Ultra HD 8MP IR Vandalproof Smart Dome IP Camera

- 4K UHD 8MP (3840 × 2160) high resolution
- H.265+, H.265, H.264+, H.264 Tri-Streams
- 120 dB True WDR & 3D Digital Noise Reduction
- Support EDGE Recording up to 128 GB
- True day & night operation
- PoE 802.3af compliant
- Impact protection up to IK10 (EN50102)
- Ingress protection up to IP67 (EN60529)

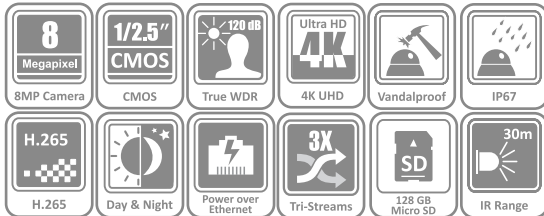

Dimensions

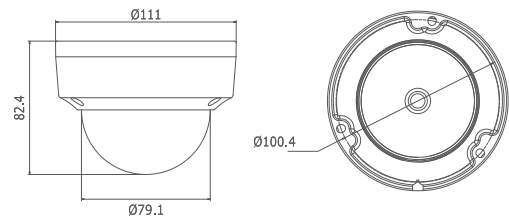

Smart Features:

- Behavior Analysis
- Line Crossing Detection
- Intrusion Detection
- Object Removal Detection
- Unattended Baggage Detection
- Facial Detection

Technical Specifications

Image Sensor	1/2.5" Progressive Scan CMOS Sensor with ICR filter
Min. Illumination	0.01 Lux (F1.2, AGC ON), 0 lux with IR
Lens	4 mm (79°), optional: 2.8, 6, 8 & 12 mm
Day & Night	30m IR Range; IR Cut Filter with Auto-Switch
Video Compression	H.265+/H.265/H.264+/H.264
Bit Rate	32 Kbps - 16 Mbps
Video Compression	Main Stream/Sub stream/Third stream
Max. Image Resolution	8MP (3840 x 2160)
Frame Rate	20fps (3840 x 2160) 25fps (3072 x 1728, 2560 x 1440, 1920 x 1080, 1280 x 720)
Image Processing	3D DNR, 120dB True WDR, BLC
Protection Level	IP67 (EN60529), IK10 (EN50102)
Alarm Trigger	Motion Detection, Tampering Alarm
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1x, QoS, IPv6
On-board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB
Security	User Authentication, Watermark
System Compatibility	ONVIF (Profile S & G) / ISAPI
Communication	1 RJ45 10 M/100 M ethernet port
Operating Conditions	-30°C - 60°C, Humidity < 95% (non-condensing)
Power Supply	12 VDC ± 25%, 6.2W; PoE (802.3af) 9W
Dimension	Dia 111 × 82mm
Weight	500 g