





## 2MP Motorised Varifocal IR Dome IP Camera

- 2MP (1920 x 1080) high resolution
- 2.8 ~ 12mm, F2.0 motorised varifocal lens with auto-focus
- 1/2.8" Progressive scan CMOS
- Tri-Streams; H.265+, H.265, H.264+, H.264
- 120 dB True WDR & 3D DNR
- Built-In micro SD / SDHC / SDXC card slot up to 128Gb
- PoE 802.3af compliant
- Impact protection up to IK10 (EN50102)

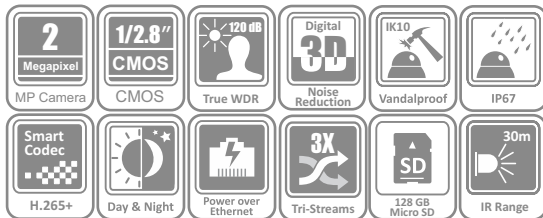

### Dimensions

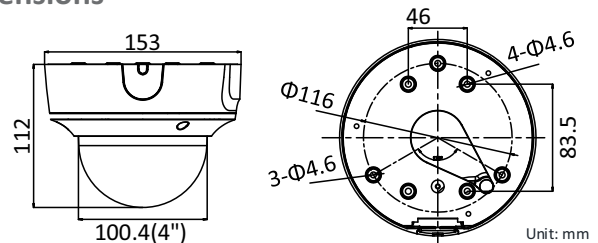

#### Mounting Accessories



### Technical Specifications

<b>Image Sensor</b>	1/2.8" Progressive Scan CMOS Sensor with ICR filter
<b>Min. Illumination</b>	0.01 Lux (F1.2, AGC ON) / 0 lux with IR
<b>Lens</b>	Motorised 2.8 ~ 12mm @ F2.0 (100° ~ 35°)
<b>Day &amp; Night</b>	IR Illumination (approx. 30m), Mechanical ICR Filter
<b>Video Compression</b>	H.265+, H.265, H.264+, H.264, MJPEG
<b>Bit Rate</b>	256 Kbps - 16 Mbps
<b>Image Processing</b>	120 dB True WDR, BLC, 3D-DNR
<b>Main Stream</b>	25fps (1920 x 1080, 1280 x 960, 1280 x 720)
<b>Sub Stream</b>	25fps (640 x 480, 640 x 360, 320 x 240)
<b>Image Setting</b>	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
<b>Network Storage</b>	NAS (Support NFS, SMB/CIFS), Automatic Network Replenishment (ANR)
<b>Smart Detection</b>	Line Crossing, Intrusion, Motion Detection, Tampering Alarm
<b>Protocols</b>	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1x, QoS, IPv6, Bonjour
<b>Security</b>	User authentication, Watermark
<b>System Compatibility</b>	ONVIF (Profile S & G) / ISAPI
<b>Communication</b>	1 RJ45 10M/100M ethernet port
<b>Onboard Storage</b>	MicroSD/SDHC/SDXC with ANR, up to 128 GB
<b>Protection</b>	Ingress: IP67; Impact: IEC60068-2-75Eh, 50J; EN50102, up to IK10
<b>Operating Conditions</b>	-30°C - 60°C (-22°F - 140°F), Humidity < 95% (non-condensing)
<b>Power Supply</b>	12 VDC ± 25%; PoE (802.3af Class 3)
<b>Power Consumption</b>	PoE Max. 6W (with IR cut filter ON)
<b>Dimension</b>	D153 × 112 mm
<b>Weight</b>	880 g