





4MP Motorised True WDR Vandal-proof Varifocal IR Dome IP Camera

- 4MP (2560 x 1440) high resolution
- 2.8 ~ 12mm, F1.6 motorised varifocal lens with auto-focus
- Progressive scan CMOS
- Support triple stream and mobile sub-stream
- 120 dB True WDR & 3D DNR
- True day & night operation
- PoE 802.3af compliant
- Impact protection up to IK10 (EN50102)

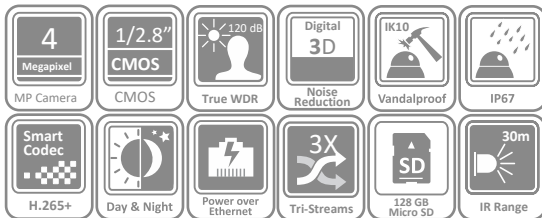

Dimensions

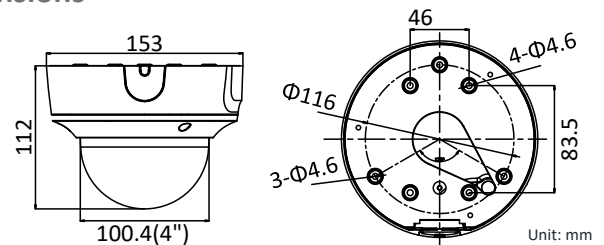

Mounting Accessories



Technical Specifications

Image Sensor	1/2.8" Progressive Scan CMOS Sensor with ICR filter
Min. Illumination	0.01 Lux (F1.2, AGC ON) / 0 lux with IR
Lens	Motorised 2.8 ~ 12mm @ F1.6 (98° ~ 28°)
Day & Night	IR Illumination (approx. 30m), Mechanical ICR Filter
Video Compression	H.265+, H.265, H.264+, H.264, MJPEG
Bit Rate	256 Kbps - 16 Mbps
Image Processing	120 dB True WDR, BLC, HLC, 3D-DNR, ROI
Main Stream	25fps/30fps (2568 x 1520, 2560 x 1440, 2304 x 1296, 1920 x 1080)
Sub Stream	25fps/30fps (640 x 480, 640 x 360, 320 x 240)
Third Stream	25fps/30fps (1280 x 720, 640 x 360, 352 x 288)
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
Network Storage	NAS (Support NFS, SMB/CIFS), Automatic Network Replenishment (ANR)
Smart Detection	Line Crossing, Intrusion, Face, Motion Detection, Tampering Alarm
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1x, QoS, IPv6, Bonjour
Security	User authentication, Watermark
System Compatibility	Open Network Video Interface/ ISAPI
Communication	1 RJ45 10M/100M ethernet port
Onboard Storage	MicroSD/SDHC/SDXC with ANR, up to 128 GB
Protection	Ingress: IP67; Impact: IEC60068-2-75Eh, 50J; EN50102, up to IK10
Operating Conditions	-30°C - 60°C (-22°F - 140°F), Humidity < 95% (non-condensing)
Power Supply	12 VDC ± 25%; PoE (802.3af Class 3) - supports PoE loop-through
Power Consumption	PoE Max. 12W (with IR cut filter ON)
Dimension	D153 x 112 mm
Weight	1305 g