





2MP IR Vandalproof WDR Mini Dome IP Camera

- 2 MP (1920 × 1080) high resolution
- H.265+, H.265, H.264+, H.264, MJPEG
- 120dB True Wide Dynamic Range
- BLC, 3D-DNR, HLC, ROI
- True day & night operation. Up to 10m IR range
- PoE 802.3af compliant
- IP66 weatherproof protection. IK08 vandalproof protection.
- Built-In Microphone

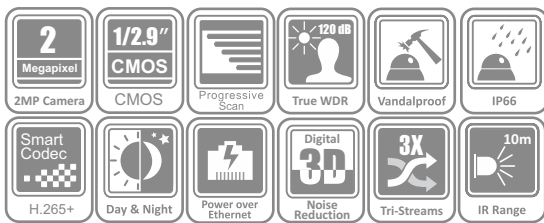

Dimensions

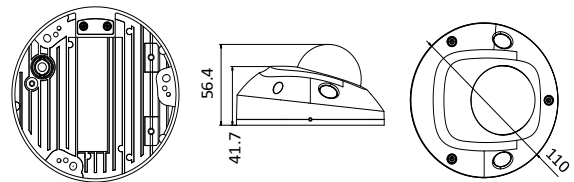

Colour Option



BLACK: IMD61W-BK

Accessories



Junction Box (White)



Junction Box (Black)

Technical Specifications

Image Sensor	1/2.7" Progressive Scan CMOS Sensor with ICR filter
Min. Illumination	0.01 Lux (F1.2, AGC ON), 0 lux with IR
Lens	4mm @ F2.0 (86°), Optional 2.8 mm (114°), 6 mm (54°)
Day & Night	IR Cut Filter with Auto-switch
Video Compression	H.265+/H.265/H.264+/H.264/MJPEG
Bit Rate	32 Kbps - 16 Mbps
Storage	Built-in Micro SD/SDHC/SDXC slot up to 128 GB, NAS (NFS, SMB/CIFS), ANR
Streams	Main Stream: 25fps (1920 x 1080, 1280 x 960, 1280 x 720) Sub Stream: 25fps (640 x 480, 640 x 360, 320 x 240) Third Stream: 25fps (1920 x 1080, 1280 x 720, 640 x 360, 352 x 288)
Image Processing	120 dB True WDR, 3D DNR, BLC, HLC
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness & White Balance
Audio	Line In or Mic In (Built-in microphone), 1 line out; 1 Alarm In, 1 Alarm Out
Audio Compression	16Kbps G722.1/64 Kbps G711ulaw/alaw/ 16Kbps G726/30-192Kbps MP2L2/PCM
Alarm Trigger	Face Detection, Line Crossing, Intrusion & Motion Detection, Dynamic Analysis, Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP UPnP, IGMP, SNMP, SIP, FTP, SRTP, 802.1x, QoS, IPv6, UDP, Bonjour, SSL/TSL
Security	User authentication, Watermark
System Compatibility	ONVIF (Profile S, Profile G, Profile T) / ISAPI / SDK
Communication	1 RJ45 10 M/100 M ethernet port
Operating Conditions	-30°C - 60°C (-22°F - 140°F), Humidity < 95% (non-condensing)
Power Supply	12 VDC ± 25%, 8.5W; PoE (802.3af Class 3), max. 10W
Protection	IK08 Impact Protection; IP66 Ingress Protection
Dimension	110 x 110 x 56.4 mm
Weight	400 g

