




4MP IR Vandalproof Mini Dome IP Camera

- 4 MP (2688 × 1520) high resolution
- H.265+, H.265, H.264+, H.264, MJPEG
- 120dB True Wide Dynamic Range
- BLC, 3D-DNR, HLC, ROI
- True day & night operation. Up to 10m IR range
- PoE 802.3af compliant
- IP66 weatherproof protection. IK08 vandalproof protection.
- 3-Axis Adjustment



Dimensions

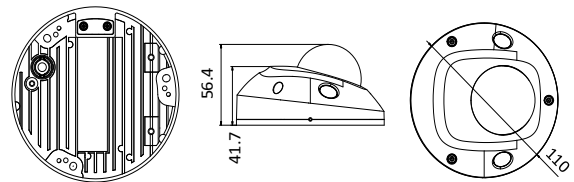

Colour Option



BLACK: IMD41W-BK

Accessories



Junction Box (White)

Junction Box (Black)

Technical Specifications

Image Sensor	1/3" Progressive Scan CMOS Sensor with ICR filter
Min. Illumination	0.01 Lux (F1.2, AGC ON), 0 lux with IR
Lens	4mm @ F2.0 (78°), Optional 2.8 mm (98°), 6 mm (48°)
Day & Night	IR Cut Filter with Auto-switch
Video Compression	H.265+, H.265, H.264+, H.264, MJPEG
Bit Rate	32 Kbps - 16 Mbps
Onboard Storage	Built-in Micro SD/SDHC/SDXC slot, up to 128 GB
Max. Image Resolution	4MP (2688 × 1520)
Frame Rate	25fps (2688 x 1520 / 2560 x 1440 / 2304 x 1296 / 1920 x 1080 / 1280 x 720)
Image Processing	120 dB True WDR, 3D DNR, BLC, ROI
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
Audio	Optional
Alarm Trigger	Face Detection, Line Crossing, Intrusion & Motion Detection, Dynamic Analysis, Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour, SSL/TLS
Security	User authentication, Watermark
System Compatibility	ONVIF (Profile S, Profile G, Profile T) / ISAPI / SDK
Communication	1 RJ45 10 M/100 M ethernet port
Operating Conditions	-30°C to 60°C, Humidity < 95% (non-condensing)
Power Supply	12 VDC ± 25%; PoE (802.3af Class 3), max. 10W
Protection	IK08 Impact Protection; IP66 Ingress Protection
Dimension	110 x 110 x 56.4 mm
Weight	400 g

