





2MP IR Vandalproof Dome IP Camera

- 2MP (1920 × 1080) high resolution
- 25 fps @ 1920 x 1080, 1920 x 720 realtime video
- 1/2.9" Progressive scan CMOS
- Support H.265+, H.265, H.264+, H.264, MJPEG tri-stream
- True day & night operation with IR illumination up to 40m
- 120 dB True Wide Dynamic Range (WDR)
- BLC, 3D-DNR, HLC, ROI
- Built-in basic analytics: Intrusion, Line Crossing & Face Detection
- Built-in microSD/SDHC/SDXC card slot, up to 128GB
- Impact protection up to IK10, Ingress protection up to IP67

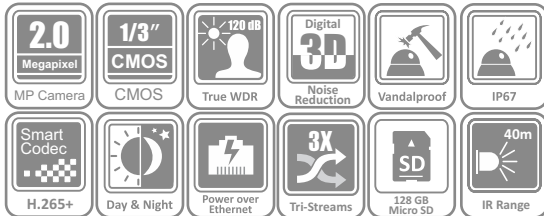

Dimensions

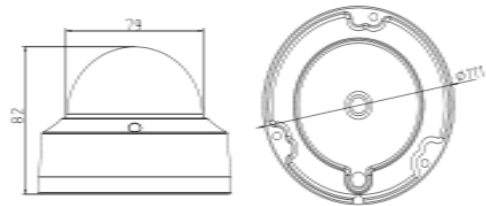

Technical Specifications

Image Sensor	1/2.9" Progressive Scan CMOS Sensor with ICR filter
Min. Illumination	0.01 Lux (F1.2, AGC ON), 0 lux with IR
Lens	4mm @ F2.0 (63.5°), 2.8, 6 & 8mm optional
Day & Night	IR Cut Filter with Auto-Switch
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG; Tri Stream
Bit Rate	32 Kbps - 16 Mbps
Image Processing	120dB True WDR, 3D-DNR, BLC, HLC, ROI
Max. Image Resolution & Frame Rate	2MP (1920 x 1080), 25fps
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
IR Illumination	Up to 40m
Protection	Ingress Protection: IP67 (IEC60529); Impact Protection: IK10 (EN50102)
Alarm Trigger	Line Crossing, Intrusion & Face Detection, Motion Detection, Dynamic Analysis, Tampering Alarm, Network Disconnect, IP Address Conflict, Storage Exception
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, UPnP, 802.1x, QoS, IPv6, Bonjour
Security	User Authentication, Watermark, IP Address Filtering
System Compatibility	ONVIF (Profile S & G) / ISAPI
On-board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB
Communication	1 RJ45 10 M/100 M ethernet port
Operating Conditions	-30°C - 60°C, Humidity < 95% (non-condensing)
Power Requirement	12 VDC ± 25%; PoE (802.3af, class 3), max. 7.5W (with IR Filter On)
Dimension	Dia 111 × 82 mm
Weight	500 g

