




## 46" Full HD LCD Video Wall Panel

- Direct-lit LED backlight with uniform brightness and no boundary shadows
- 1920 × 1080 resolution, 178° viewing angle
- Ultra-narrow 1.7 mm bezel design
- Factory calibration for color uniformity
- Anti-glare, high definition, high brightness, high color gamut, and vivid images with rich colors
- Robust 24-hour continuous operation
- Metal casing for preventing from radiation and magnetic & electric field interference
- Wall-mount and modular brackets available to meet various installation requirements

### Dimensions

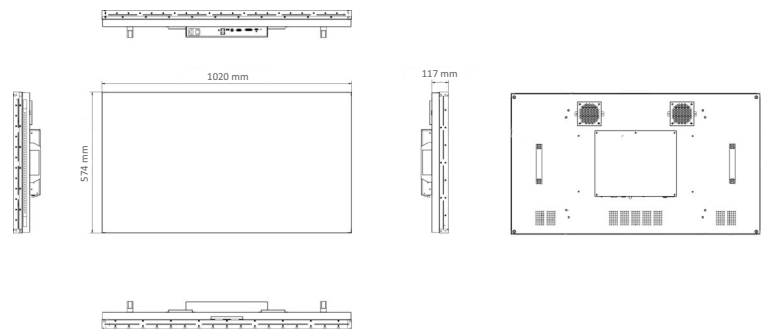

### Technical Specifications

Screen Size	46 inch
Active Display Area	1018 x 573 mm
Backlight	Direct-lit LED backlight
Pixel Pitch	0.53025 mm
Physical Seam	1.7 mm
Colour Saturation	92%
Resolution	1920 x 1080 @ 60 Hz (downward compatible)
Brightness	700 cd/m <sup>2</sup>
Viewing Angle	178° (H) x 178° (V)
Color Depth	8 bit, 16.7M
Contrast Ratio	4500:1
Response Time	6 ms (G to G)
Input Interface	HDMI x 1, DVI x 1, VGA x 1, YPbPr x 1, CVBS x 1
Output Interface	DVI x 1, VGA x 1, CVBS x 2
Control Interface	RS232 IN x 1, RS232 OUT x 1
Optional Interface	IN: 3G SDI, DP, HDBase-T, TVI; OUT: 3G SDI, DP, HDBase-T, TVI; RJ45
Operating Conditions	0°C - 50°C, Humidity 10% to 90% (non-condensing)
Power Requirement	100~264VAC, 50/60 Hz; <139W (<0.5W standby)
Dimension	1020 x 574 x 117 mm
Weight	20 kg