




49" Full HD LCD Video Wall Panel

- Direct-lit LED backlight with uniform brightness and no boundary shadows
- 1920 × 1080 resolution, 178° viewing angle
- Ultra-narrow 3.5 mm bezel design
- Factory calibration for color uniformity
- Anti-glare, high definition, high brightness, high color gamut, and vivid images with rich colors
- Robust 24-hour continuous operation
- Metal casing for preventing from radiation and magnetic & electric field interference
- Wall-mount and modular brackets available to meet various installation requirements

Dimensions

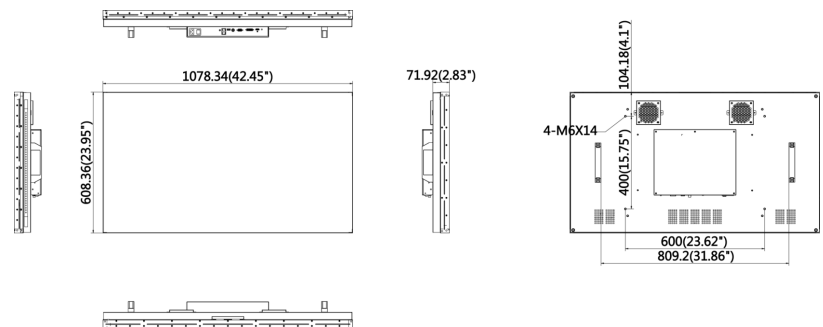

Technical Specifications

Screen Size	49 inch
Active Display Area	1074 x 604 mm
Backlight	Direct-lit LED backlight
Pixel Pitch	0.56 mm
Physical Seam	3.5 mm
Bezel Width	2.3 mm (top/left), 1.2 mm (bottom/right)
Resolution	1920 x 1080 @ 60 Hz (downward compatible)
Brightness	500 cd/m ²
Viewing Angle	178° (H) x 178° (V)
Color Depth	8 bit, 16.7M
Contrast Ratio	1200:1
Response Time	8 ms (G to G)
Color Gamut	72% NTSC
Surface Treatment	Haze 25%, 3H
Interface	HDMI x 1, DVI x 1, VGA x 1, CVBS x 1, USB x 1, RS232 IN x 1, RS232 OUT x 1
Operating Conditions	0°C - 40°C, Humidity 10% to 80% (non-condensing)
Power Requirement	100~240VAC, 50/60 Hz; <134W (<0.5W standby)
Dimension	1078 x 608 x 72 mm (Mounting 600H x 400V mm)
Weight	22.5 kg