



IR Weatherproof Motorised Varifocal 4MP IP Camera

- 4 Megapixel (2688 × 1520) high resolution
- 2 Behaviour Analysis, Face Detection
- 140 dB Ultra WDR, 3D-DNR, BLC, HLC, ROI
- 2.8 ~ 12mm motorised varifocal lens with Smart Focus
- H.265+, H.265, H.264+, H.264 Smart Codec
- PoE 802.3at compliant, supports PoE loop-through
- Built-In micro SD/SDHC/SDXC card slot, up to 128 Gb
- Anti-static dust free
- Multi-level user management with multiple protection

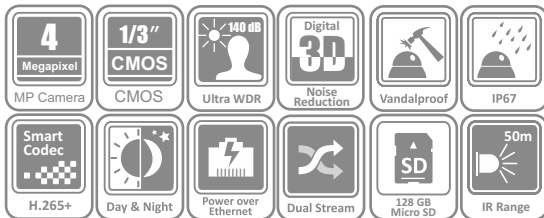

Dimensions

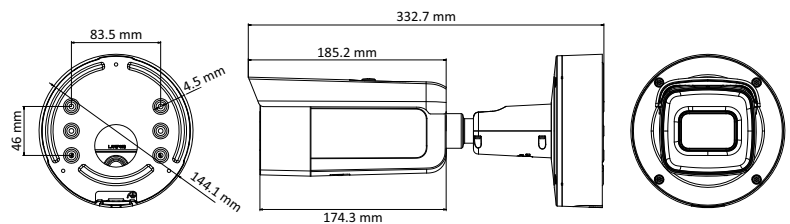

Technical Specifications

Image Sensor	1/3" Progressive Scan CMOS Sensor with ICR filter
Min. Illumination	0.0005 lux @(F1.2, AGC ON)
Lens	Motorised 2.8 ~ 12mm @ F1.6 (104° ~ 29°)
Day & Night	Up to 50m IR Range, Mechanical ICR Filter
Video Compression	H.265+, H.265, H.264+/H.264/MJPEG
Bit Rate	256 Kbps - 16 Mbps
Video Streams	3 (Main, Sub & Third Stream)
Max. Image Resolution	2688 x 1520
Frame Rate	Main Stream: 25fps (2688 x 1520, 2560 x 1440, 2304 x 1296, 1920 x 1080) Sub Stream: 25fps (640 x 480, 640 x 360, 320 x 240) Third Stream: 25fps (1280 x 720, 640 x 360, 352 x 288)
Image Setting	Saturation, Brightness, Contrast, Sharpness (via client software or web browser)
Audio	64 Kbps (G.711) / 16Kbps (G.722.1) / 16 Kbps (G.726) / 32-192 Kbps (MP2L2)
Alarm Trigger	Motion detection, Video Tampering, Network Disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP 802.1x, QoS, IPv6, Bonjour
Security	User authentication, Watermark
System Compatibility	ONVIF (Profile S & G) / ISAPI
Communication	1 RJ45 10 M/100 M Ethernet port
Operating Conditions	-30°C - 60°C, Humidity < 95% (non-condensing)
Power Supply	12 V DC ± 25%; PoE (802.3at, class 4) - supports PoE loop-through
Power Consumption	Max. 14.5W
Dimension	D144.1 × 332.7 mm
Weight	1740 g