




Physical Interfaces

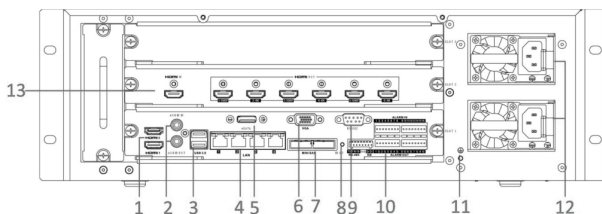

No.	Name	No.	Name
1	HDMI 1/2 Video Output	9	RS-232 Interface
2	Audio Input	10	Alarm Input
3	Audio Output		Alarm Output
4	USB 3.0		RS-485 Interface
5	LAN		Keyboard Interface
6	eSATA Interface	11	Ground
7	VGA Video Output	12	Power Supplies
8	Mini SAS Interface (Optional)	13	Decoding board
	Reset Button		

Various Applications

- Centralized management of IP cameras is supported, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc.
- Connectable to smart IP cameras from Hikvision and the recording, playing back, and backing up of VCA alarms can be realized.
- VCA detection alarm is supported.
- VCA search for facial detection, behavior analysis, people counting and heat map.
- Supports starting record with one key.
- Realizes instant playback for assigned channel during multi-channel display mode.
- Smart search for the selected area in the video; and smart playback to improve the playback efficiency.

Embedded Network Video Recorder

- New logical and visualized GUI design.
- Adopts professional embedded hardware and software, and pioneering dual-OS design to ensure the reliability of system running.
- Supports redundant power supply to improve the system stability.
- Supports HDD hot swap with RAID0, RAID1, RAID5, RAID 6, and RAID10 storage scheme configurable.
- Either normal or hot spare working mode is configurable to constitute an N+1 hot spare system.

Video Input and Transmission

- Up to 128 IP cameras can be connected.
- Supports live view, storage, and playback of the connected camera at up to 12 megapixels resolution.
- H.265+ compression effectively reduces the storage space by up to 75%.
- 4 self-adaptive 10M/100M/1000M network interfaces.
- Adopt stream over TLS encryption technology (enhanced SDK service and RTP over HTTPS protocol)
- Connectable to the third-party network cameras like ACTI, Arecont, AXIS, Bosch, Brickcom, Canon, ONVIF, PANASONIC, Pelco, SAMSUNG, SANYO, SONY, Vivotek and ZAVIO.

- Simultaneous HDMI 1/VGA output as the main output and the HDMI 2 works as the auxiliary output.
- HDMI and VGA1 simultaneous outputs by default. Asynchronous outputs configurable.
- Video outputs at up to 4K (4096×2160) resolution.
- Supports decoding up to 20 channels at 1080p resolution.

Storage and Playback

- Up to 16 SATA interfaces and 1 eSATA interface provided for HDD connection.
- 10 TB capacity for each HDD.
- HDD health monitoring.
- Supports HDD quota and group modes; different capacity can be assigned to different channels.
- Normal/Important/Custom video playback.