


32" Industrial Grade LED Monitor




- LED backlit technology with Full HD 1920 x 1080.
- 3D Digital Comb Filter, 3D De-interlace, 3D Noise Reduction.
- True color OSD and user-friendly operation menu.
- Multiple interfaces: HDMI, VGA, DVI, BNC input, BNC output, audio in, audio out, USB.
- Wide viewing angle 178°(H) / 178°(V).
- Support software spread-spectrum technology to reduce EMI radiation.
- Robust high grade components for 24/7 operation.
- Adopt Mstar ACE-5 auto color and image enhancement engine, improve image contrast, detail and edge.
- Built-in Loudspeakers.

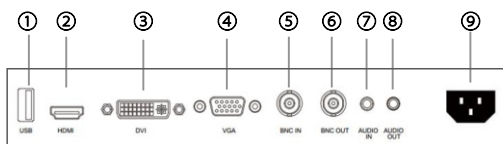

NO.	Description
1	USB
2	HDMI: HDMI signal input
3	DVI: DVI signal input
4	VGA: VGA Analog Signal Input
5	BNC IN : BNC signal input
6	BNC OUT : BNC signal output
7	AUDIO IN
8	AUDIO OUT
9	AC power input

Dimensions

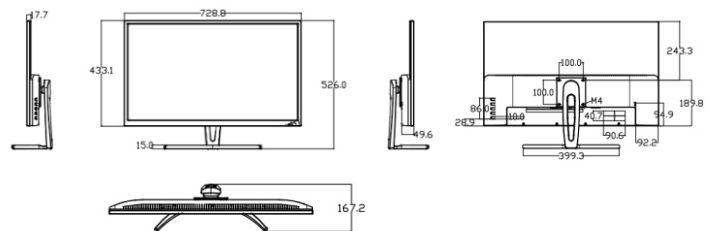

Technical Specifications

Display Type	TFT-LED Backlight
Screen Size	31.5"
Dot Pitch	0.36375 x 0.36375 mm
Max Resolution	1920 x 1080
Brightness	300 cd/m ²
Contrast	1000 : 1
Response Time	8 ms
Colour	16.7 M
Viewing Angle	Horizontal 178°, Vertical 178°
Viewable Area (HxV)	698.4 x 392.85 mm
Interface	HDMI x 1, VGA x 1, DVI x 1, BNC In/Out: 1/1, Audio In/Out: 1/1, USB x 1
Mounting	100 x 100 mm, M4
Power Requirements	100~240VAC, 50/60 Hz; <45W
Operating Temperature	0°C ~ 40°C;
Operating Humidity	Humidity 10~85% (Non-Condensing)
Dimensions (WxHxD)	729 x 433 x 50 mm
Weight	5.75 kg