


43" Industrial Grade Full HD LED Monitor



- Support 8bit/10bit 2-ch LVDS (1920×1080) HD display
- 3-D digital comb filter
- Support audio output
- True color OSD and user-friendly operation menu
- 1 channel HDMI 1.3 input interface, support HDCP 1.2
- 3D noise reduction technology
- Support high definition JPEG decoding
- Programmable 12-bit RGB gamma correction technology
- Support software spread-spectrum technology to reduce EMI radiation
- Adopt Mstar ACE-5 auto color and image enhancement engine, improve image contrast, detail and edge

Dimensions

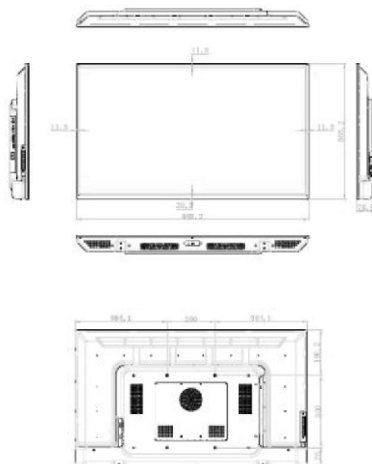

Technical Specifications

Display Type	TFT-LED Backlight
Screen Size	42.5"
Dot Pitch	0.4902 x 0.4902 mm
Max Resolution	2K (1920 x 1080)
Brightness	260 cd/m2
Contrast	1200 : 1
Response Time	8 ms
Colour	16.7M
Viewing Angle	Horizontal 178°, Vertical 178°
Viewable Area (HxV)	945.2 x 533.4 mm
Interface	HDMI x 1, VGA x 1, DVI x 1, BNC x 1, Audio In x 1
Mounting	400 x 400 / 400 x (125+400) mm
Power Requirements	100~240VAC, 50/60 Hz; <65W
Operating Temperature	0°C ~ 40°C;
Operating Humidity	Humidity 10~85% (Non-Condensing) / Storage -20°C~55°C
Dimensions (WxHxD)	968.2 x 565.2 x 78.5 mm
Weight	9.1 kg