




55" Industrial Grade LED Monitor

- LED backlit technology with FullHD 1920 x 1080
- Adopt 3-D digital comb filter
- True color OSD and user-friendly operation menu
- 1 channel HDMI 1.3 input interface, support HDCP 1.2
- Adopt 3D noise reduction technology
- 3D De-interlace, Skin Correction
- Wide viewing angle 178°(H) / 178°(V)
- Built-in speaker
- Image freeze function
- Robust high grade components for 24/7 operation

Dimensions

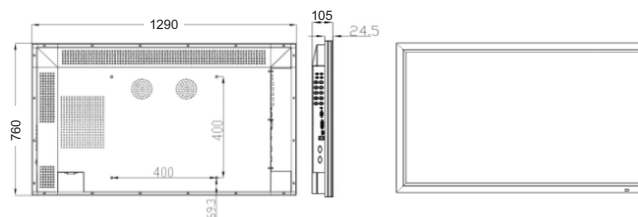

Technical Specifications

Display Type	TFT-LED Backlight
Screen Size	55"
Dot Pitch	0.630 x 0.630 mm
Max Resolution	1920 x 1080
Brightness	500 cd/m2
Contrast	1400 : 1
Response Time	8 ms
Colour	16.7 M
Viewing Angle	Horizontal 178°, Vertical 178°
Viewable Area (HxV)	1240 x 710 mm
Interface	HDMI x 1, VGA x 1, S-VIDEO x 1, BNC x 1, Audio In/Out: 1/1
Mounting	200 x 200 mm
Power Requirements	100~240VAC, 50/60 Hz; <80W
Operating Temperature	0°C ~ 40°C;
Operating Humidity	Humidity 10~85% (Non-Condensing) / Storage -20°C~55°C
Dimensions (WxHxD)	1290 x 760 x 105 mm
Weight	33.73 kg