





## 2MP IR Vandalproof Dome IP Camera

- 2MP (1920 × 1080) high resolution
- 25 fps @ 1920 x 1080, 1280 x 960, 1280 x 720 realtime video
- 1/2.8" Progressive scan CMOS
- Support H.265+, H.265, H.264+, H.264, MJPEG dual stream
- True day & night operation with IR illumination up to 35m
- 120 dB True Wide Dynamic Range (WDR)
- BLC, 3D-DNR, ROI
- Built-in basic analytics: Intrusion Detection & Line Crossing
- Built-in microSD/SDHC/SDXC card slot, up to 128GB
- Impact protection up to IK10, Ingress protection up to IK10

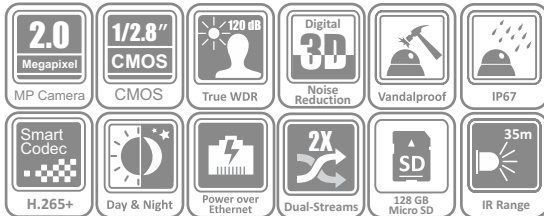

### Dimensions

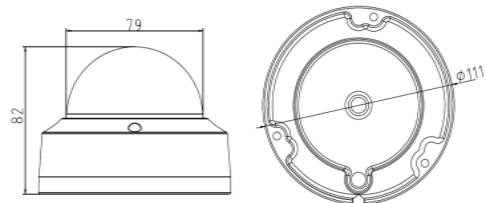

### Technical Specifications

<b>Image Sensor</b>	1/2.8" Progressive Scan CMOS Sensor with ICR filter
<b>Min. Illumination</b>	0.01 Lux (F1.2, AGC ON), 0 lux with IR
<b>Lens</b>	2.8mm @ F2.0 (115°x62°) (2.1mm (130°x72°), 4mm (86°x47°)& 6mm (55°x41°) optional)
<b>Day &amp; Night</b>	IR Illumination (up to 35m), Mechanical ICR Filter
<b>Video Compression</b>	H.265+ / H.265 / H.264+ / H.264 / MJPEG; Dual Stream
<b>Bit Rate</b>	32 Kbps - 16 Mbps
<b>Image Processing</b>	120dB True WDR, 3D-DNR, BLC, ROI
<b>Main Stream</b>	25fps (1920 x 1080, 1280 x 960, 1280 x 720)
<b>Sub Stream</b>	25fps (704 x 576, 640 x 480, 352 x 288, 320 x 240)
<b>Image Setting</b>	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
<b>Alarm Trigger</b>	Line Crossing, Intrusion Detection, Motion Detection, Dynamic Analysis, Tampering Alarm, Network Disconnect, IP Address Conflict, Storage Exception
<b>Protocols</b>	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, UPnP, 802.1x, QoS, IPv6, Bonjour
<b>Security</b>	User Authentication, Watermark, IP Address Filtering
<b>System Compatibility</b>	ONVIF (Profile S & G) / ISAPI
<b>On-board Storage</b>	Built-in microSD/SDHC/SDXC slot, up to 128 GB
<b>Communication</b>	1 RJ45 10 M/100 M ethernet port
<b>Protection</b>	Ingress Protection: IP67 (IEC60529); Impact Protection: IK10 (EN50102)
<b>Operating Conditions</b>	-30°C - 60°C, Humidity < 95% (non-condensing)
<b>Power Requirement</b>	12 VDC ± 25%; PoE (802.3af), max. 6.5W (with IR Filter On)
<b>Dimension</b>	Dia 111 × 82 mm
<b>Weight</b>	500 g

