





## 2MP Intellisense IR Vandalproof Dome IPC

- 2MP (1920 × 1080) high resolution, low illumination sensor
- 25 fps @ 1920 x 1080 realtime video
- 1/2.7" Progressive scan CMOS
- Support H.265+, H.265, H.264+, H.264, MJPEG up to 4 streams
- True day & night operation with IR illumination up to 40m
- 120 dB True WDR, BLC, 3D-DNR, HLC, ROI
- Deep Learning Human and Vehicle Classification
- Intrusion, Line Crossing, Face Detection, Unattended Baggage, Object Removal, Scene Change, Audio Exception
- Optional built-in microphone
- Impact protection up to IK10, Ingress protection up to IP67

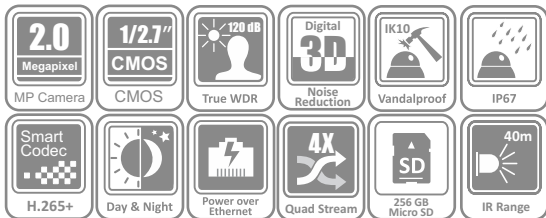

### Dimensions

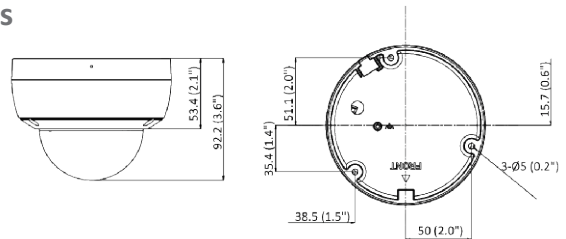

### Accessories



### Technical Specifications

<b>Image Sensor</b>	1/2.7" Progressive Scan CMOS Sensor with ICR filter
<b>Min. Illumination</b>	0.003 Lux (F1.4, AGC ON), 0 lux with IR
<b>Lens</b>	2.8mm @ F1.4 (98°) (4 (80°) & 6 (51°) mm optional)
<b>Day &amp; Night</b>	IR Cut Filter with Auto-Switch
<b>Video Compression</b>	H.265+ / H.265 / H.264+ / H.264 / MJPEG; Tri Stream
<b>Bit Rate</b>	32 Kbps - 16 Mbps
<b>Image Processing</b>	120dB True WDR, 3D-DNR, BLC, HLC, ROI
<b>Image Resolution &amp; Frame Rate</b>	Main Stream: 25fps (1920 x 1080, 1280 x 720) Sub-Stream: 25fps (640 x 480, 640 x 360); Third Stream: 10fps (1920 x 1080, 1280 x 720, 640 x 480, 640 x 360)
<b>Image Setting</b>	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
<b>IR Illumination</b>	Up to 40m
<b>Protection</b>	Ingress Protection: IP67 (IEC60529); Impact Protection: IK10 (EN50102)
<b>Behaviour Analysis</b>	Line Crossing, Intrusion & Face Detection, Unattended Baggage, Object Removal, Scene Change, Audio Exception & Face Detection
<b>Protocols</b>	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, UPnP, 802.1x, QoS, IPv6, Bonjour
<b>Audio</b>	1 input (line in) max 3.3vpp, 4.7kW, 1 output (line out) max 2.2vpp, 100W
<b>System Compatibility</b>	ONVIF (Profile S, G & T) / ISAPI / SDK / ISUP
<b>On-board Storage</b>	Built-in microSD/SDHC/SDXC slot, up to 256 GB with ANR
<b>Communication</b>	1 RJ45 10 M/100 M ethernet port
<b>Operating Conditions</b>	-30°C to 60°C, Humidity < 95% (non-condensing)
<b>Power Requirement</b>	12 VDC ± 25%; PoE (802.3af, class 3), max. 7.5W (with IR Filter On)
<b>Dimension</b>	Dia 121.5 × 92 mm
<b>Weight</b>	580 g

