

PXL-PK-PGD-OGD223

Outdoor Guidance LED Display



| Product Overview

This LED parking guidance display is designed to provide real-time parking information and directional guidance within parking facilities. Featuring a full-matrix LED screen, it displays numbers, letters, and directional arrows to help drivers quickly locate available parking spaces and navigate efficiently throughout the facility.

Built for reliable indoor and outdoor operation, the display supports network-based communication for centralized management and real-time updates. Its high-visibility tri-color LED design, wide operating temperature range, and durable construction make it ideal for commercial buildings, shopping malls, airports, hospitals, universities, and smart parking deployments.

| Key Features

- ✓ Real-Time Parking Guidance Display
- ✓ Full-Matrix LED Display Technology
- ✓ Displays Numbers, Text & Arrows
- ✓ Tri-Color LED Visual Indicators
- ✓ Network-Based Communication Interface
- ✓ High-Visibility Information Display
- ✓ Wide Operating Temperature Range
- ✓ Suitable For Smart Parking Systems

| TECHNICAL SPECIFICATION

INTERFACE

Network Interface	1 × 10/100 Mbps Self-Adaptive Ethernet Port
-------------------	---

DISPLAY SCREEN

Resolution	32 × 16 Pixels
Screen Size	320 × 480 mm
Display Content	Numbers, Letters, Arrows
Screen Type	Full Matrix LED Display
Display Colors	Red, Green, Yellow
Number of Modules	3
Module Size	320 × 160 mm
Display Mode	Real-Time Display

GENERAL

Operating Temperature	-30°C to +60°C
Operating Humidity	≤95% RH (Non-Condensing)
Operating Voltage	100–240 VAC
Maximum Power Consumption	90 W
Dimensions	362 × 522 × 110 mm
Net Weight	9 ± 0.2 kg
Gross Weight	10.5 ± 0.2 kg
Package Dimensions	475 × 635 × 225 mm


COMPLIANCE

EMC Compliance	EN 55032, EN 55035, EN IEC 61000-3-2, EN 61000-3-3
Safety Compliance	IEC 62368-1:2014, IEC 62368-1:2018, EN 62368-1:2014+A11:2017

** Technical specifications and images are subject to changes*

| TECHNICAL SPECIFICATION

MECHANICAL DIMENSION


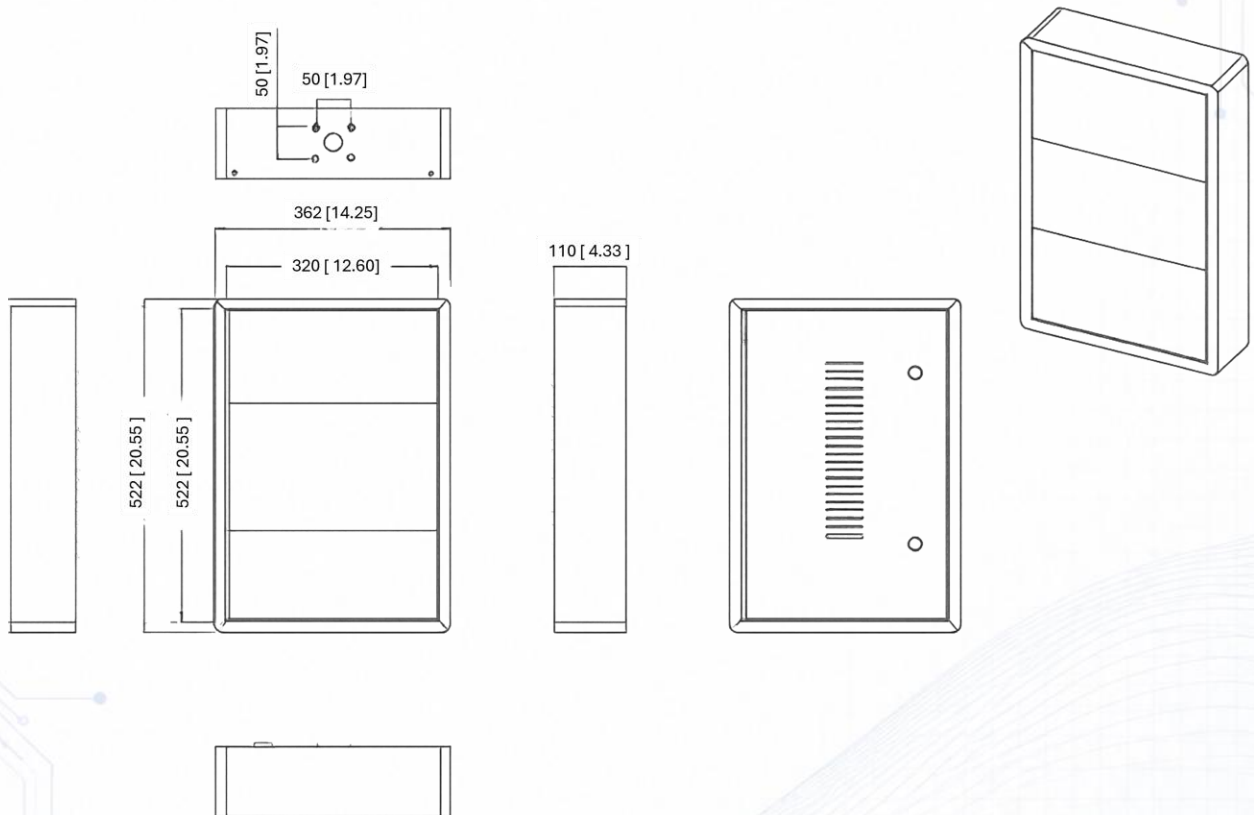


* Technical specifications and images are subject to changes



PIXELab

Technologically Advanced Building Solutions

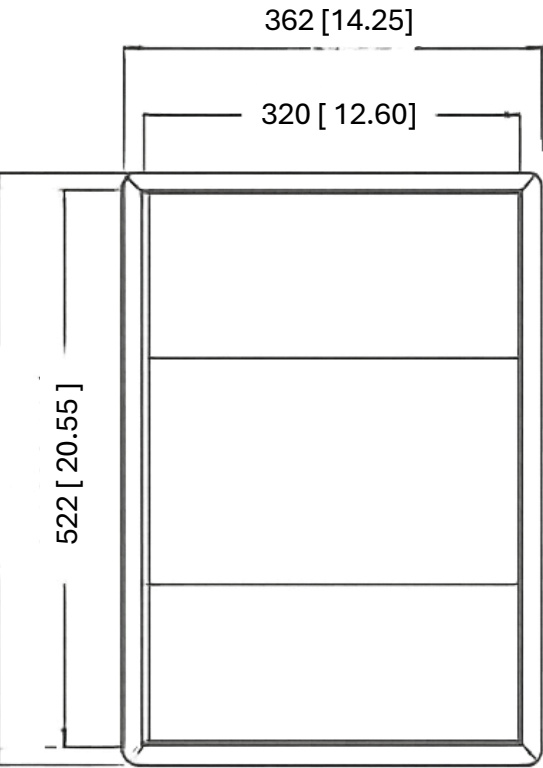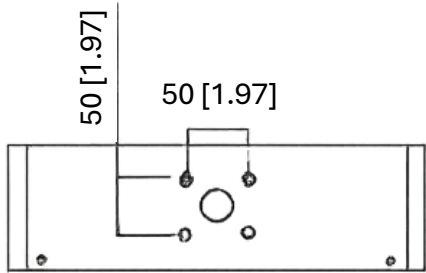

110 [4.33]

