





30x Full HD 1080P IR PTZ Dome Camera

- Full HD 1080P Video Output
- 1/3" 2MP CMOS Image Sensor
- 0.05 lux/F1.6 (Colour) / 0.01 lux/F1.6 (B/W)
- 30x Optical Zoom (4.3 ~ 129mm)
- 16x Digital Zoom
- True Day & Night with ICR Filter
- IR Illumination up to 120m
- 3D Intelligent Positioning
- Privacy Masking, DWDR, 3D-DNR
- Electronic Image Stabiliser (EIS)
- Weatherproof rated to IP66
- Lightning, Surge & Transient Voltage Protection

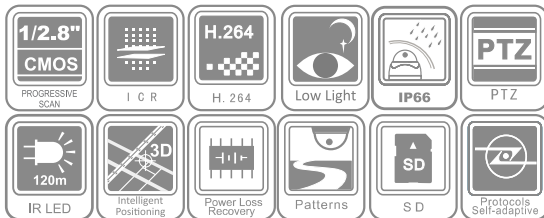

Dimensions

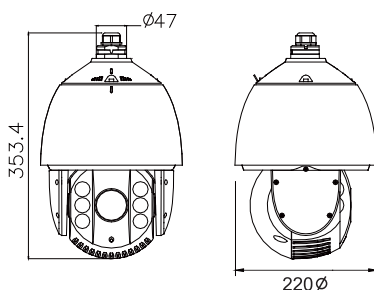

Technical Specifications

Image Sensor	1/3" 2MP CMOS Sensor with ICR filter
Image Resolution	1920 x 1080
Min. Illumination	0.02 Lux (F1.6, Color) / 0.002 Lux (F1.6, B/W)
Optical Zoom	30 X
Digital Zoom	16 X
Lens	4 ~ 120mm @ F1.6 ~ F4.4 (58 ~ 1.7°)
Pan	360° endless (0.1 - 160°/s manual / 240°/s preset)
Tilt	-15 ~ 90° Auto-Flip (0.1° ~ 120°/s manual / 200°/s preset)
Preset & Pattern	256 presets, 8 patrols (32 presets/patrol), 4 patterns
Day & Night	IR Cut Filter with Auto-Switch
Park Action	Preset / Patrol / Pattern / Scan Mode: Pan / Tilt / Frame / Random / Panorama
RS-485 Interface	Half-duplex mode, Self-adaptive PIXELab, Pelco-P, Pelco-D protocol
IR Distance	120 m, Automatic Intensity Adjustment
White Balance	Auto / Manual / ATW / Indoor / Outdoor
Image Processing	AWB / AGC / 3D-DNR / BLC / DWDR / EIS / 8-Zone Privacy Masking
Operating Conditions	-30°C ~ 65°C, Humidity < 90% (non-condensing)
Power Supply	24 VAC, 50W max.
Protection	IP66, TVS 4kV lightning protection, surge protection, transient voltage protection
Dimension	Dia 220 x 353.4 mm (outdoor)
Weight	4.5 kg