


IP Door Station

- 2MP HD camera with high quality image
- 120° wide angle of view
- 3.5-inch colorful LCD screen with 480 x 320 resolution
- Unlocks by cards and pin-codes
- Supports configuration via Web remotely



VIC303DB

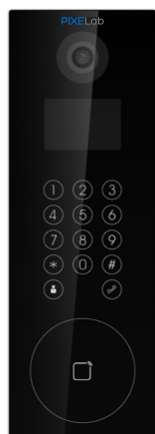

VIC303DA



VIC303DM

Technical Specifications

VIC303DB

VIC303DA

VIC303DM

System Parameters

Operation system	Embedded Linux operation system		
Flash	4 GB		
RAM	512 MB		
CPU	Embedded processor		

Display Parameters

Size	3.5-inch		
Operation method	Display screen, physical buttons		
Type	Colorful LCD		
Resolution	480 x 320		

Video Parameters


Audio compression standard	H.264		
Supplement light	Low illumination, IR supplement lights		
Lens	2 MP HD camera		
FOV	Horizontal: 70°, Vertical : 118°, Diagonal: 132°	Horizontal: 70°, Vertical : 121°, Diagonal: 131°	
WDR	Support		
Pixel	Main stream: 1920 x 1080p, 720p ; Sub stream: 640 x 480		

Audio Parameters


Audio input	Built-in omnidirectional microphone		
Audio compression standard	G.711 U, G.711 A		
Audio output	Built-in loudspeaker		
Audio compression bitrate	64 Kbps		
Audio quality	Noise suppression and echo cancellation		
Volume adjustment	Adjustable		

Technical Specifications	VIC303DB	VIC303DA	VIC303DM
Capacity			
Fingerprint capacity		/	
User capacity		10000	
Face capacity		/	
Linked indoor station		500	
Event capacity		/	
Network parameters			
Communication protocol		TCP/IP, RTSP	
Wired network		Support	
Wi-Fi		/	
Bluetooth		/	
3G/4G		/	
Device interfaces			
Alarm input	6	8	6
TAMPER		1	
Network interface	1 10/100/1000 Mbps self adaptive, RJ45 analog interface		
Exit button		2	
RJ-485	2	1	2
USB		0	
Wiegand		1	
TF card		/	
Alarm output		2	
Lock control	2	1	2
Door control input		2	
Power interface		1	
General			
Button	/	14 physical buttons	/
Installation		Flush mounting	
Indicator		/	
Weight	Without package With package	1.05kg 2.166 kg	
Protective level		IP 65	
Power supply method		12 VDC	
Working temperature		-40°C to +55°C (-40° F to +135° F)	
Working humidity		10% to 95%	
Dimensions	418 x 145 x 61 mm (16.46" x 5.71" x 2.40")	357.3 x 124.3 x 55.3 mm (14.07" x 4.89" x 2.18")	418 x 145 x 59.7 mm (16.46" x 5.71" x 2.35")
Battery		/	
Power supply		≤10W	
Application environment		Outdoor	


Dimension

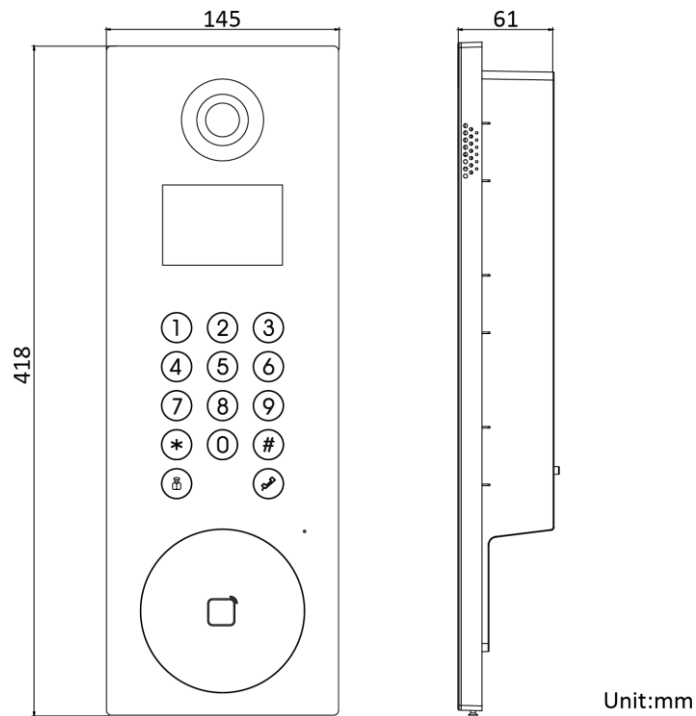

VIC303DB

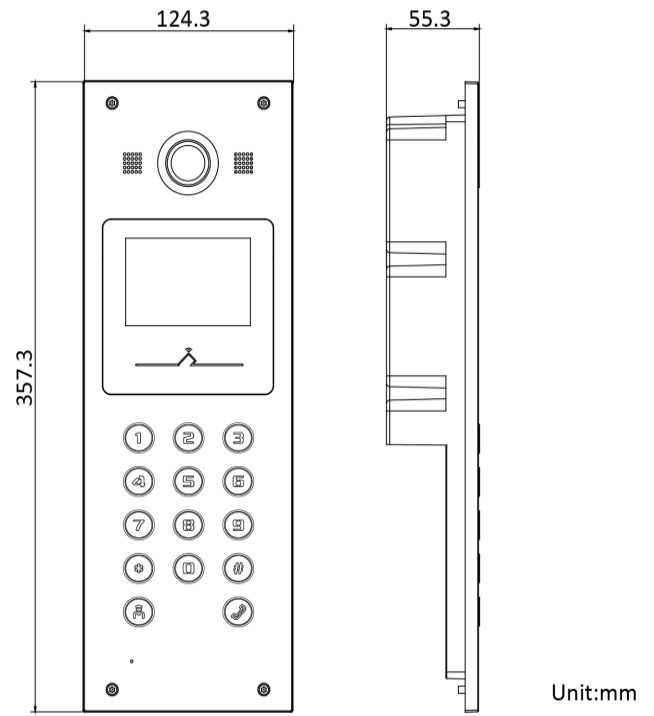

VIC303DA

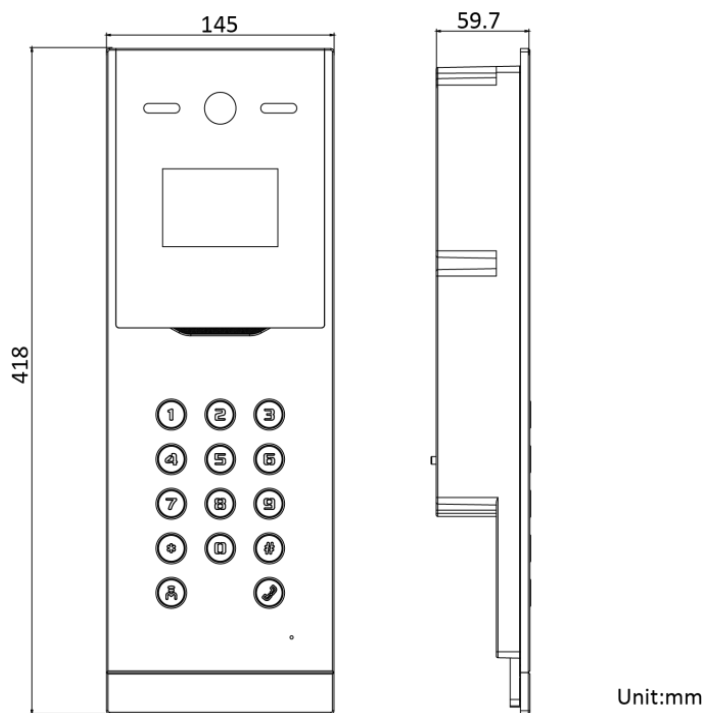

VIC303DM